



SULLAIR 375 SERIES

375H, 400HH, 425H

Portable Lubricated Rotary Screw Air Compressors
Tier 4 Final Emissions Compliant

375–425 cfm at 150–200 psi ■ 10.6–12 m³/min at 10.3–13.8 bar



adroit@adroit-aes.com | www.adroit-aes.com

ADROIT ENGINEERING SERVICES WLL
P.O. Box 24867, DOHA, QATAR. Tel +974 4480 6925

ADROIT STAR GENERAL TRADING L.L.C.
P.O. Box 391609, DUBAI, U.A.E. Tel +9714 434 1120

ADROIT STAR OIL FIELD EQUIPMENT TRADING L.L.C.
P.O. Box 39758, ABU DHABI, U.A.E. Tel +9712 551 6726

DURABILITY MEETS VERSATILITY

DESIGNED TO GET THE JOB DONE

Sullair 375 Series portable air compressors are ready to hit the ground running for a variety of jobsite applications. With multiple units in the family — including the award-winning 400HH featuring air pressures up to 200 psig — our diversified fleet is powered by the legendary Sullair 16-Series Air End and features a modern design primed to perform at the jobsite.

Multiple Engine Options

- Caterpillar C4.4 (T4F)
- Perkins 1204F (T4F)

Compact Design

- Easier towing to and from the jobsite
- Improved maneuverability — fits more easily in smaller spaces
- More convenient storage — on the jobsite or at the yard

Easy Pressure Change

- Select models shift from low to high pressure with the turn of a switch

Quiet Operation

- 74 decibels at 23 feet operating at full load


Extended Runtime

- Oversized 65 gallon fuel tank
- Up to 10 hours of runtime at full load
 - 5–7% improvement in fuel consumption at full load compared to previous models

Easy Service and Maintenance

- Swing doors with slam latches to ensure doors stay open
- Easy access to key components including:
 - Cooler; aftercooler (if equipped); battery and battery disconnect
 - Compressor fluid filter
 - Compressor air filter
 - Engine filters

...and more

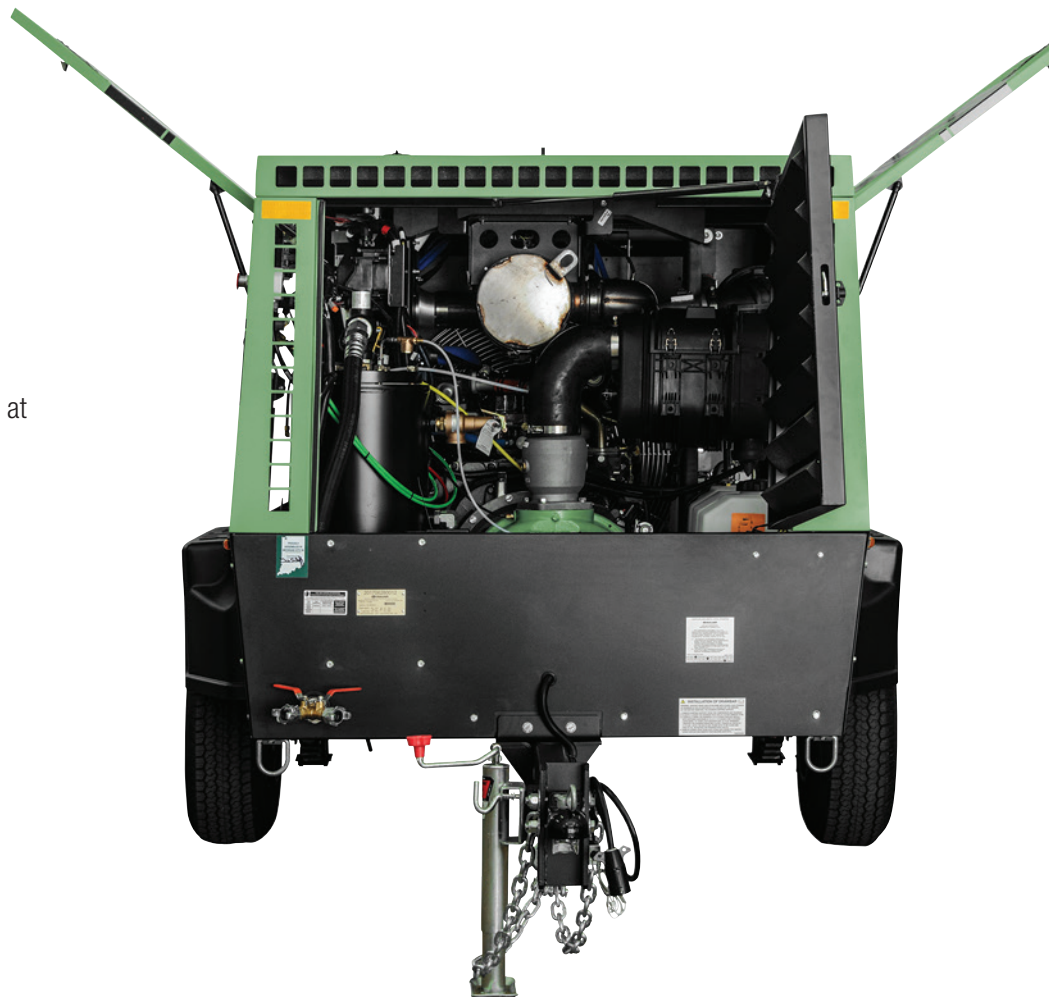

STANDARD FEATURES

- Legendary Sullair 16-Series Air End
- Low Fuel Shutdown
- Discharge Temperature Sensor
- Electric Brakes
- LED Tail, Turn and Clearance Lights
- Sullair AWF® All Weather Fluid — Factory Fill Lubricant

CUSTOMIZE YOUR COMPRESSOR

Options and Extras

- Cold weather package
- Jack caster with wheels
- Mechanical parking brake
- Single or dual hose reels (except 400HH)
- Aftercooled and filtered

VALUE IN VERSATILITY

375 Series Applications

- General construction
- Abrasive blasting
- Optical fiber installation
- Plant backup air
- Pipeline work
- ...and more

All 375 Series models also available without running gear



TECHNICAL SPECIFICATIONS

FOR MORE INFORMATION, CONTACT YOUR LOCAL AUTHORIZED SULLAIR DISTRIBUTOR.

PERFORMANCE			
	375H (T4F)	400HH (T4F)	425H (T4F)
Actual Delivery <i>cfm (m³/min)</i>	375 (10.6)	400 (11.3)	425 (12)
Rated Pressure <i>psig (bar)</i>	150 (10.3)	200 (13.8)	150 (10.3)
Pressure Range <i>min/max (bar)</i>	80 (5.5) / 175 (12.1)	80 (5.5) / 225 (15.5)	80 (5.5) / 175 (12.1)
Fuel Consumption Full Load <i>gal/h (l/h)</i>	5.9 (22.3)	7.4 (28)	7.7 (29.1)
Maximum Operating Altitude <i>ft (m)</i>	9000 (2743)	9000 (2743)	9000 (2743)

ENGINES — AVAILABLE MAKES & MODELS: CATERPILLAR C4.4 & PERKINS 1204F			
Emissions Level	Tier 4 Final		
Operating Speed <i>rpm</i>	2100	1900	2100
Available Power <i>bhp (kW)</i>	122 (91)	157 (117)	
Displacement <i>in³/l</i>	269 (4.4)		
Cooling System Capacity <i>gal (l)</i>	6.9 (26)		
Engine Oil Capacity <i>qts (l)</i>	8.5 (8)	12 (11.5)	
Fuel Tank Capacity <i>gal (l)</i>	65 (246)		
Electrical System Voltage	12		
Battery Rating <i>CCA</i>	1125		
DEF Consumption <i>% of Fuel</i>	2.3%		
DEF Capacity <i>gal (l)</i>	5 (19)		

COMPRESSOR			
Service Valves <i>No. & (Size)</i>	2 (¾")	1 (1½")	2 (¾")
Compressor Oil Capacity <i>gal (l)</i>	8 (30)		

DPQ PACKAGE — INCLUDES RUNNING GEAR	
Working weight <i>lbs (kg)</i>	4840 (2195)
Dry weight <i>lbs (kg)</i>	4200 (1905)
Length <i>in (mm)</i>	156 (3962)
Width <i>in (mm)</i>	78 (1958)
Height <i>in (mm)</i>	76 (1921)
Track Width <i>in (mm)</i>	67 (1702)
Max Towing Speed <i>mph (km/h)</i>	55 (89)
Axle Rating <i>lbs (kg)</i>	5000 (2268)
Tire Size	225/75R15

DLQ PACKAGE — LESS RUNNING GEAR	
Working weight <i>lbs (kg)</i>	4610 (2092)
Dry weight <i>lbs (kg)</i>	3970 (1801)
Length <i>in (mm)</i>	101 (2577)
Width <i>in (mm)</i>	59 (1506)
Height <i>in (mm)</i>	64 (1619)

* Non-aftercooled